

sloper.fit -- CALIBRATION TEST SHEET & PATTERN OVERVIEW

GARMENT: WOMEN'S PRINCESS SEAM PANELS UK 8 | PROFILE: UK 8 / US 4 / EU 36 (S) | DATE: 18/02/2020 | REV: 1.5 | HASH: 54af42c9



PHYSICAL SCALE VERIFICATION INSTRUCTIONS FOR SEWERS

- 1. Printer Setup:** Print this Page 1 alone. In your printer dialogue, set Page Scaling to "Actual Size" or "100%". Turn OFF "Fit to Printable Area" or "Shrink oversized pages".
- 2. Ruler Check:** Measure the outer black box above with a physical millimeter ruler. It must measure exactly 100 mm x 100 mm (10.0 cm / 3.94 in). If off by even 1-2mm, the garment will fit incorrectly.
- 3. Print Pattern:** Once 100mm scale is verified, proceed to print Sheets 2 through 9 (the 4 x 2 pattern tile grid).

PATTERN TILE ASSEMBLY GRID (4 COLUMNS x 2 ROWS = 8 TILES)

Trim right and bottom border lines along dashed cutlines. Align corner crosshairs and tape sheets together in numerical sequence:

p.2	p.3	p.4	p.5
p.6	p.7	p.8	p.9

PRINCESS CENTER BACK
(HALF-PATTERN)


CUT 2 | Self Fabric / Muslin

Cut 2 separate panels | 15mm seam allowance included on Center Back for zipper

+15mm Seam Allowance

CENTER BACK (CB) - CUT 2

GRAINLINE

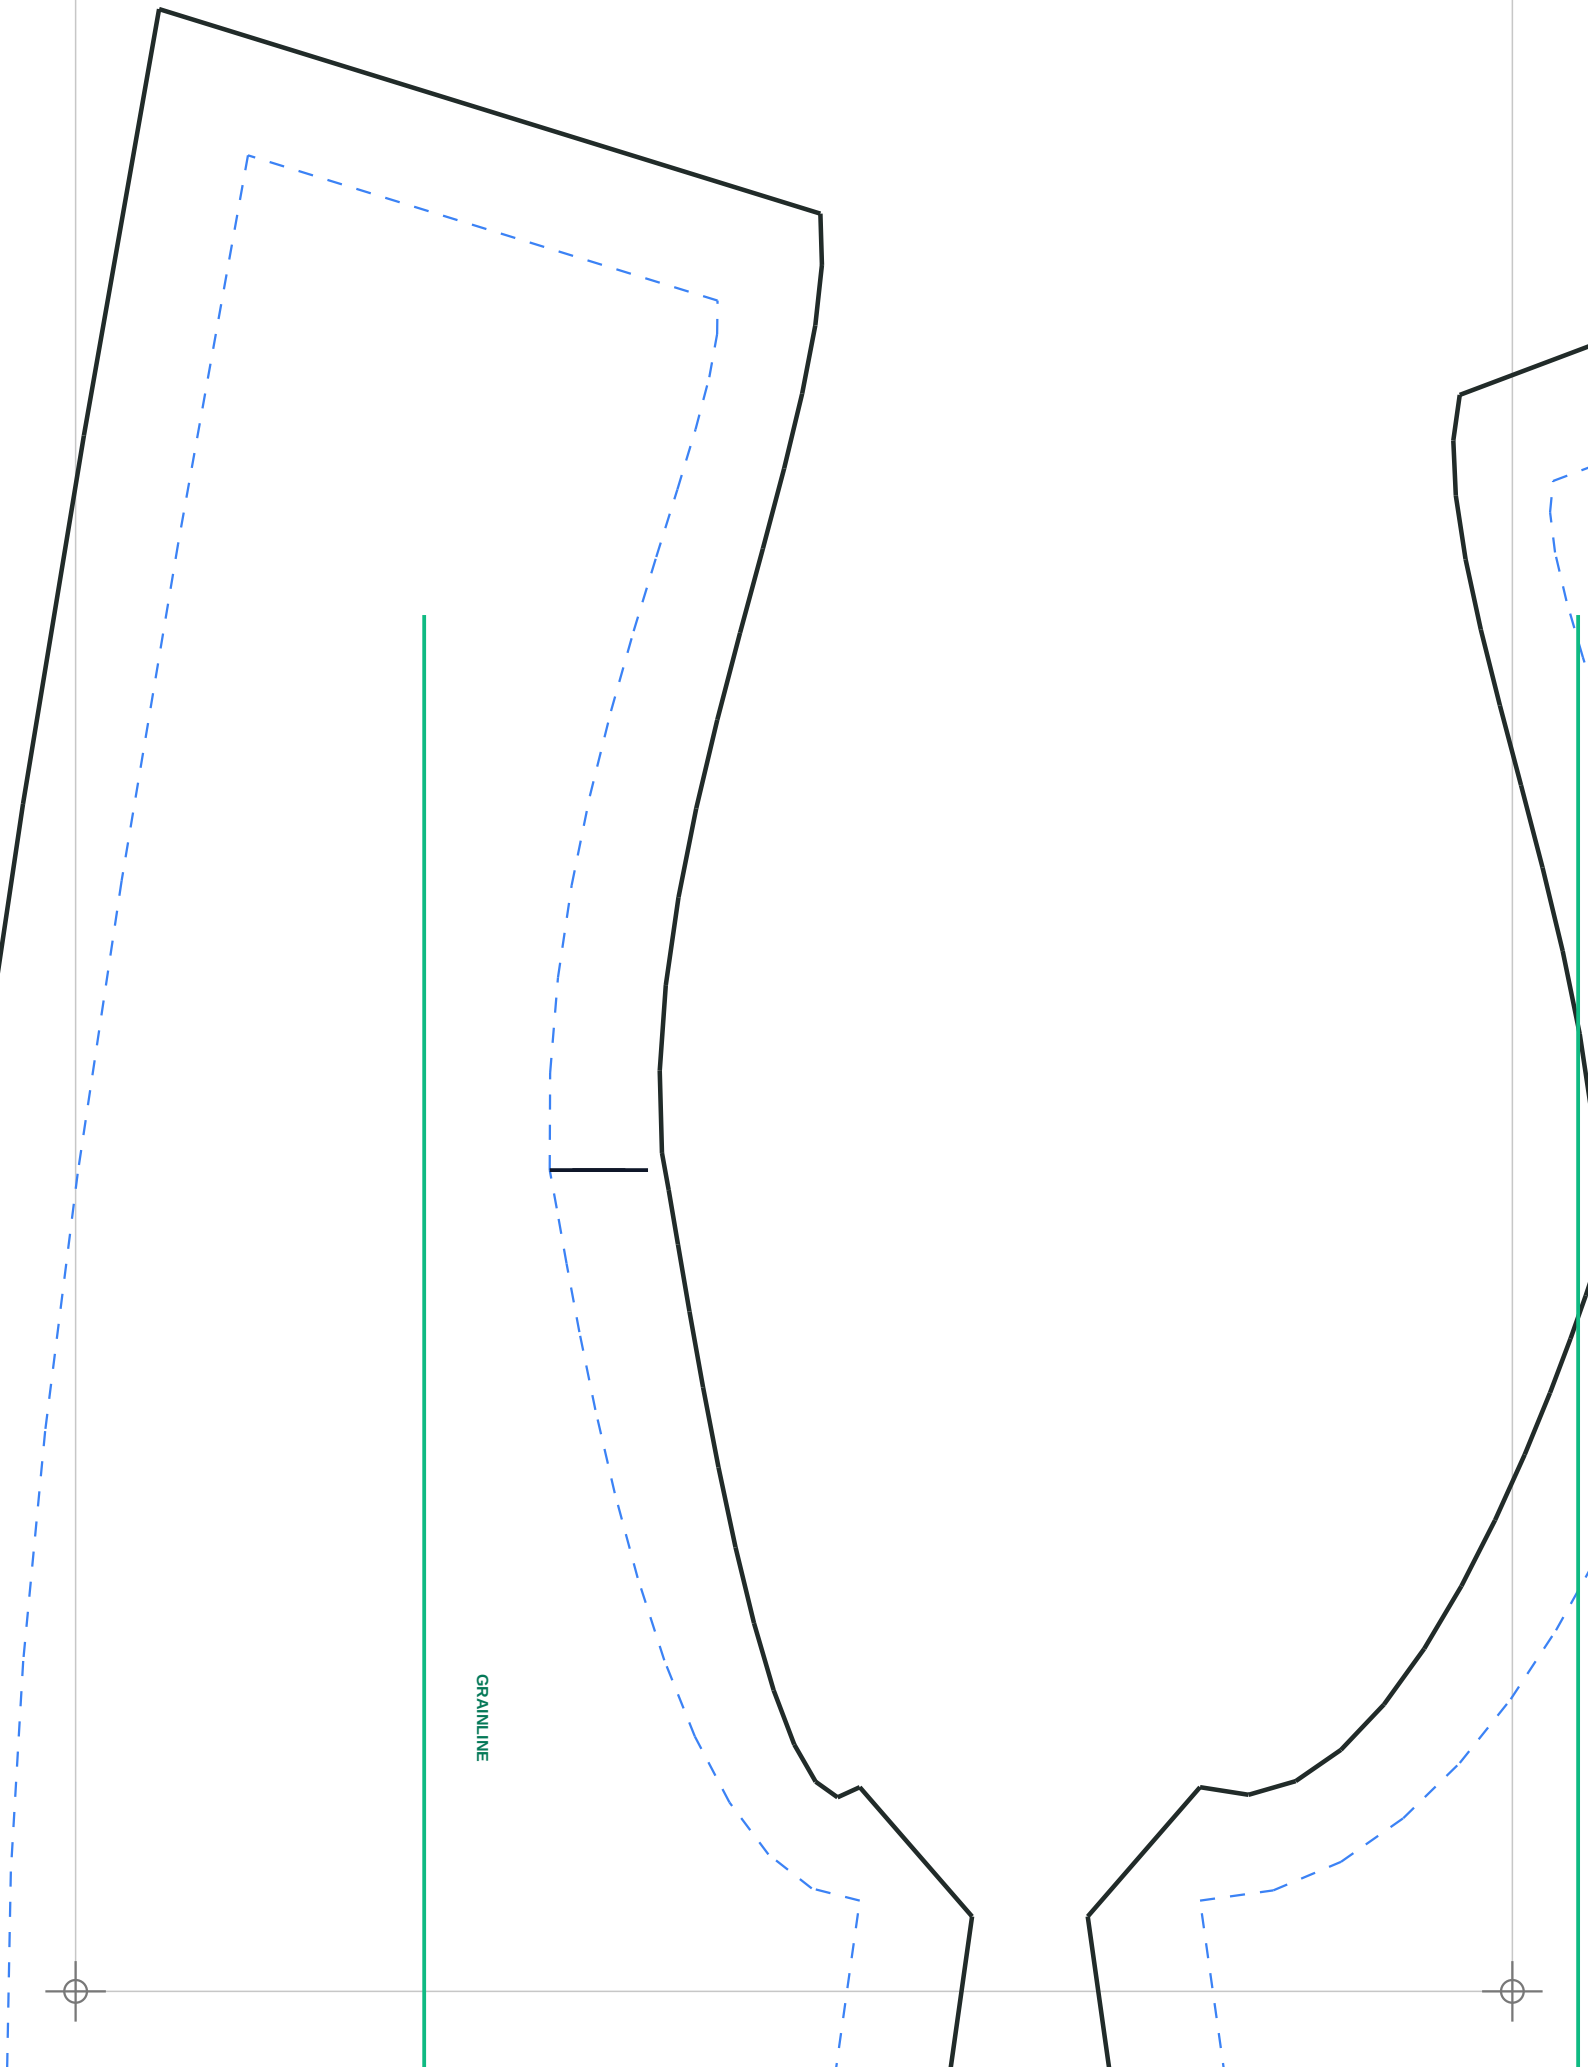




**PRINCESS SEAM PANEL
(HALF-PANEL)**

CUT 1 ON FOLD D
/ Mus

Fold fabric along Co
seam allowa

+15mm Seam

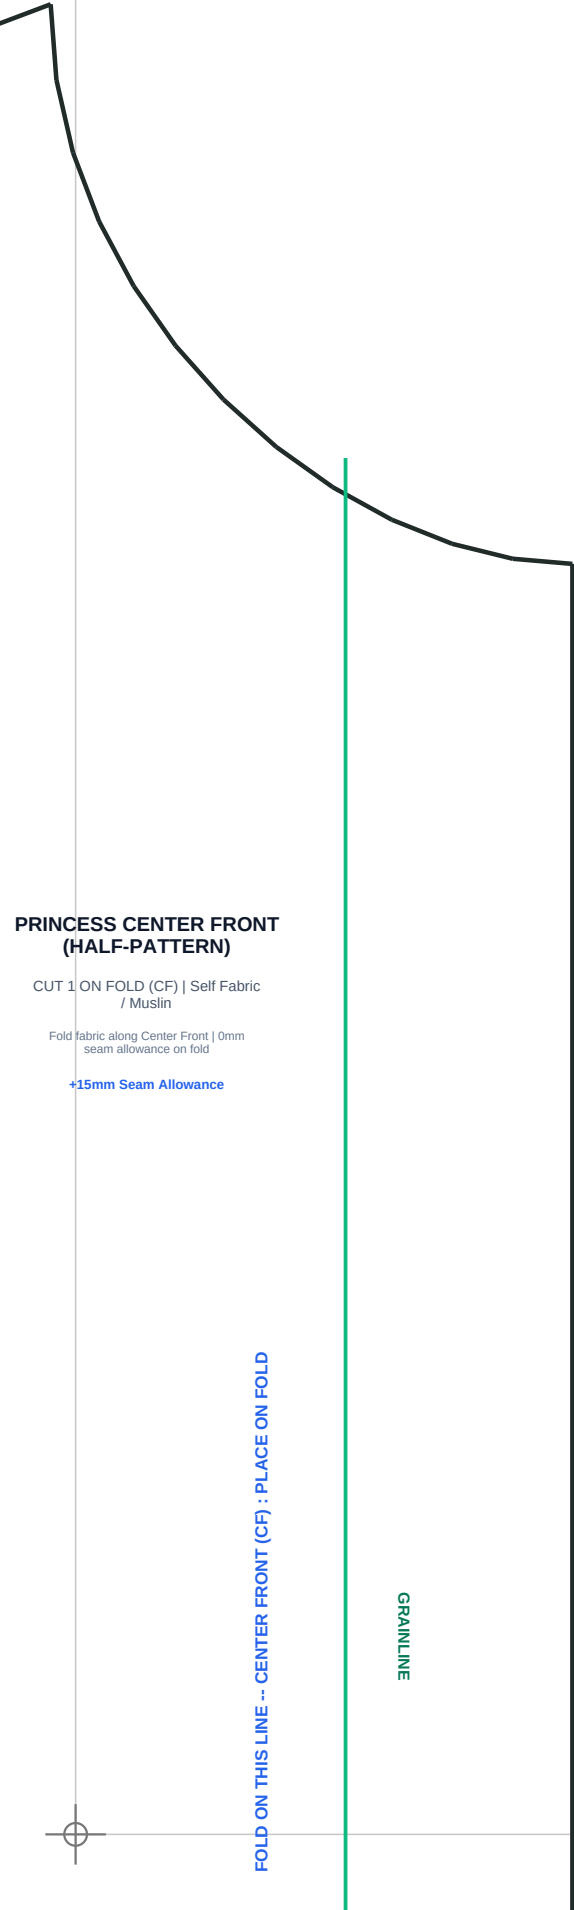

**PRINCESS CENTER FRONT
(HALF-PATTERN)**

CUT 1 ON FOLD (CF) | Self Fabric
/ Muslin

Fold fabric along Center Front | 0mm
seam allowance on fold

+15mm Seam Allowance

FOLD ON THIS LINE -- CENTER FRONT (CF) : PLACE ON FOLD

GRAINLINE

PRIN

CUT
Place

Cut 2 m


+15

PRINCESS SIDE BACK

CUT 1 PAIR (Left & Right) |
Place on folded fabric. | Self
Fabric / Muslin

Cut 2 mirrored panels through folded
fabric (Left & Right)

+15mm Seam Allowance

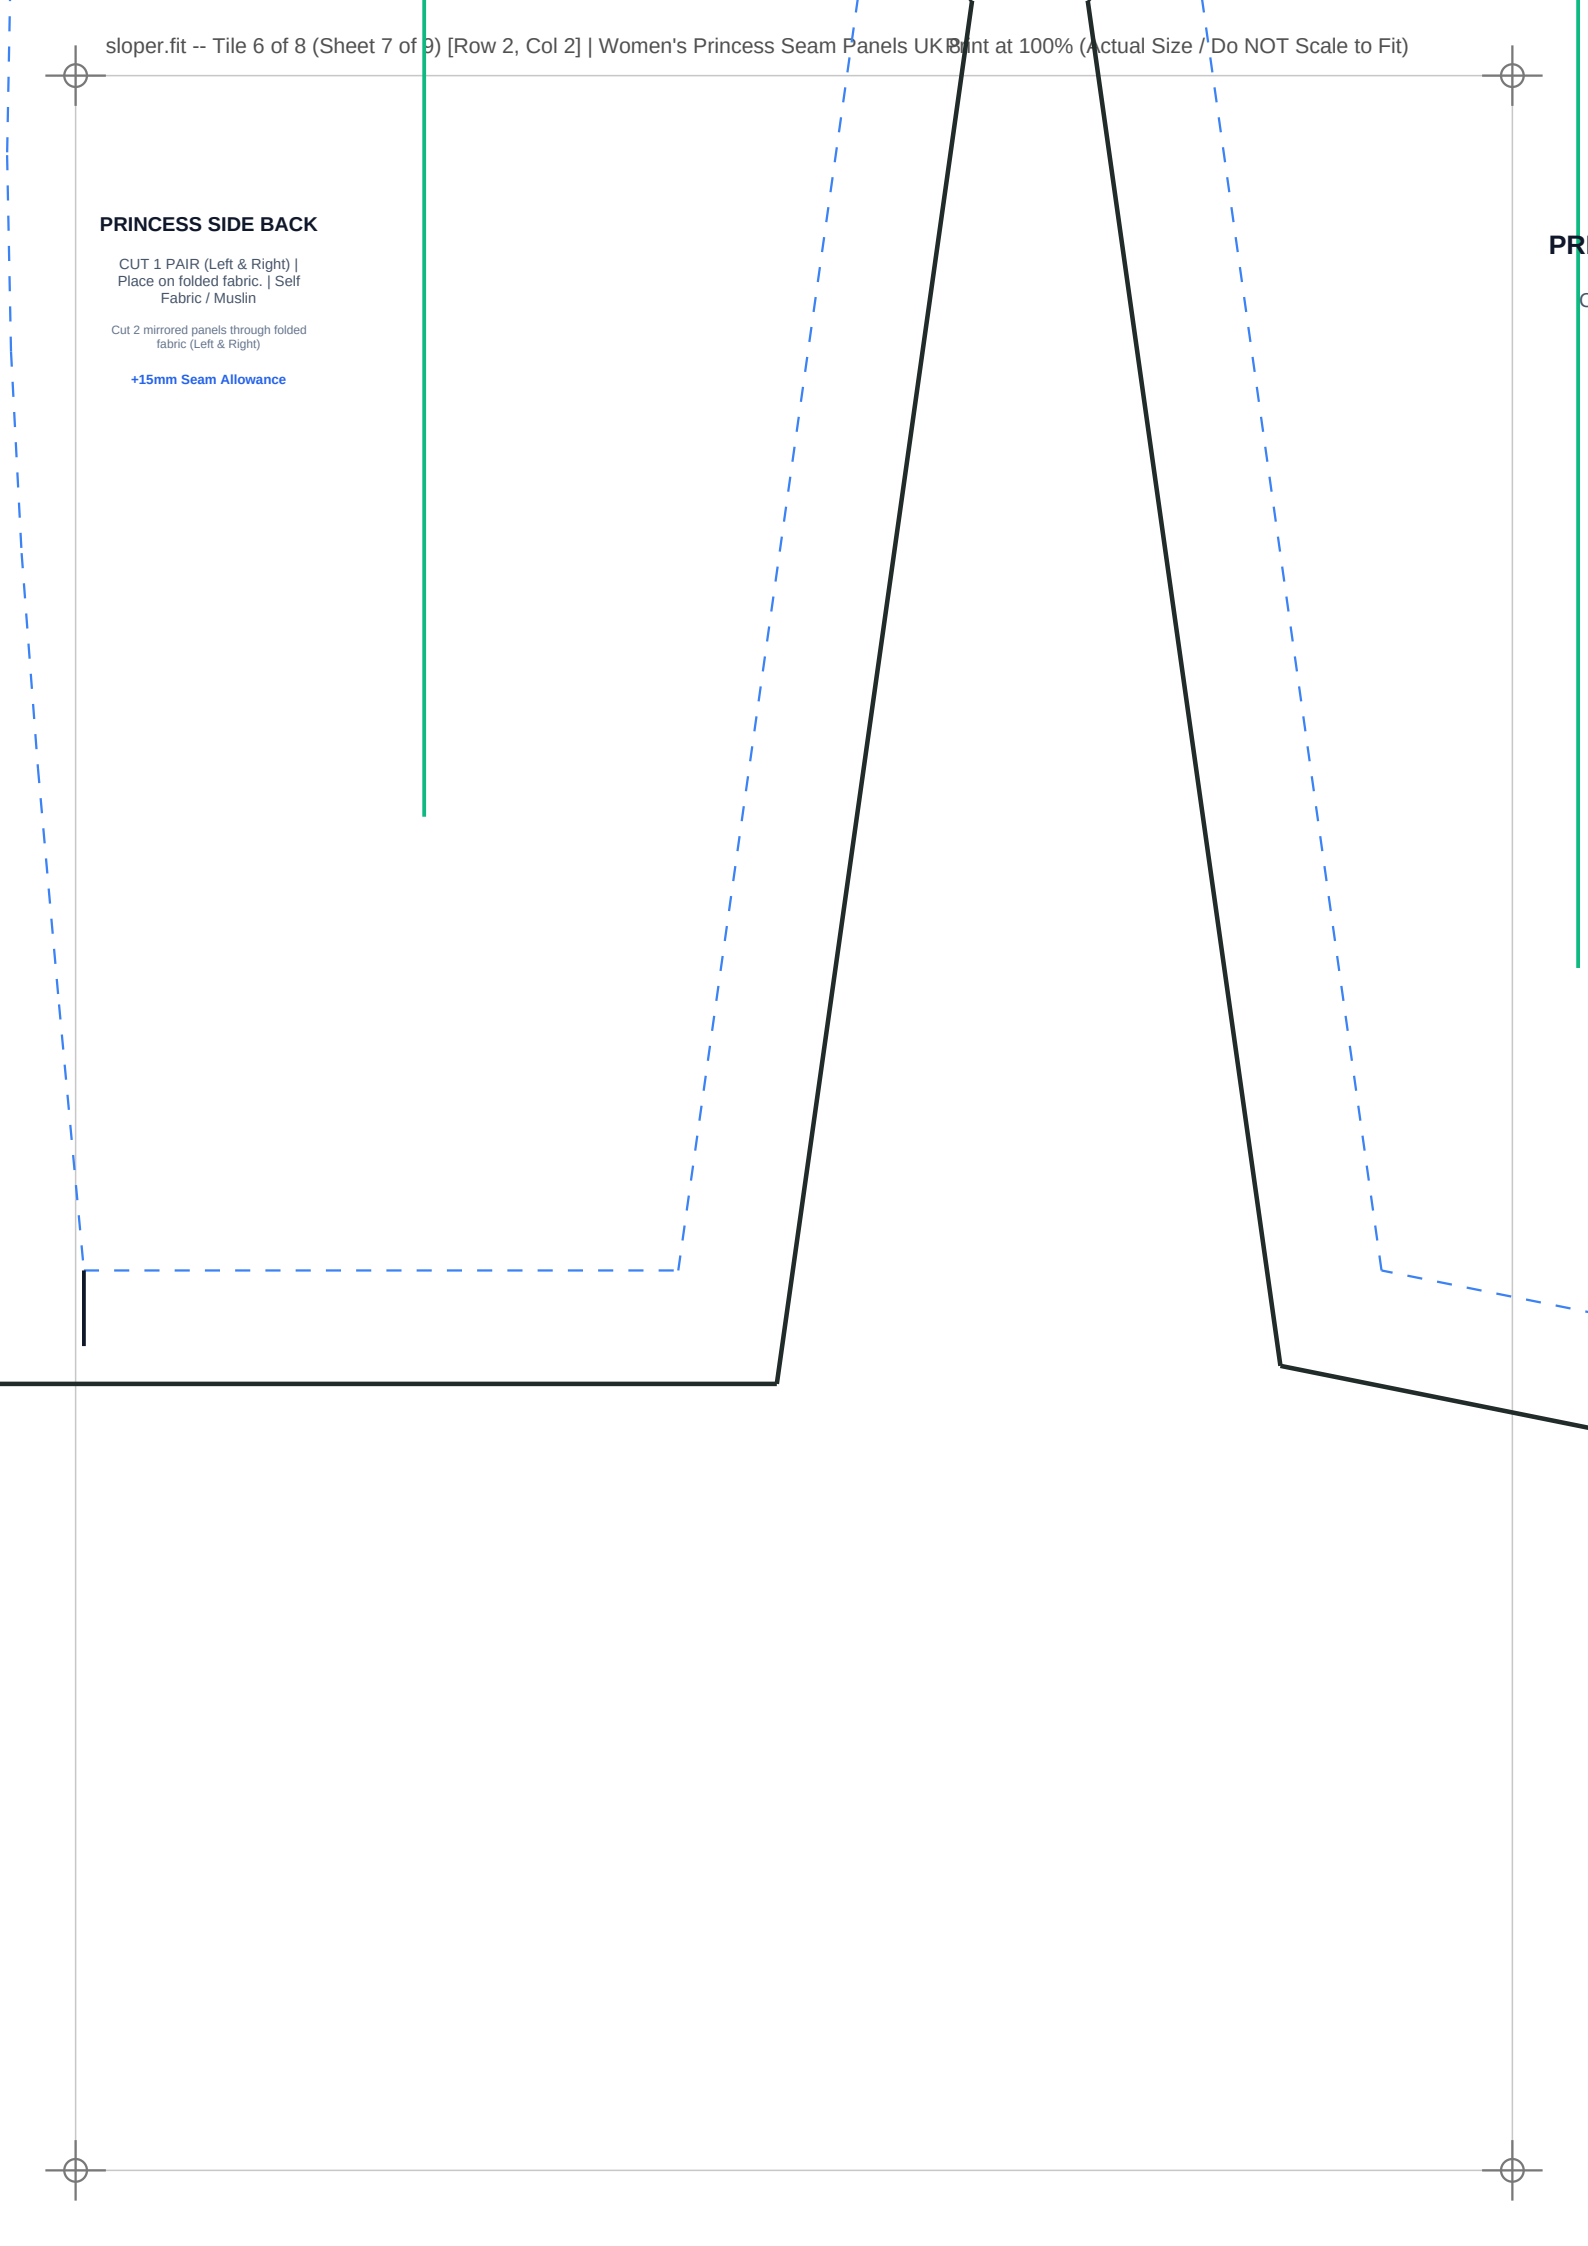


PRINCESS SIDE FRONT

CUT 1 PAIR (Left & Right) |
Place on folded fabric. |
Self Fabric / Muslin

Cut 2 mirrored panels through
folded fabric (Left & Right)

+15mm Seam Allowance

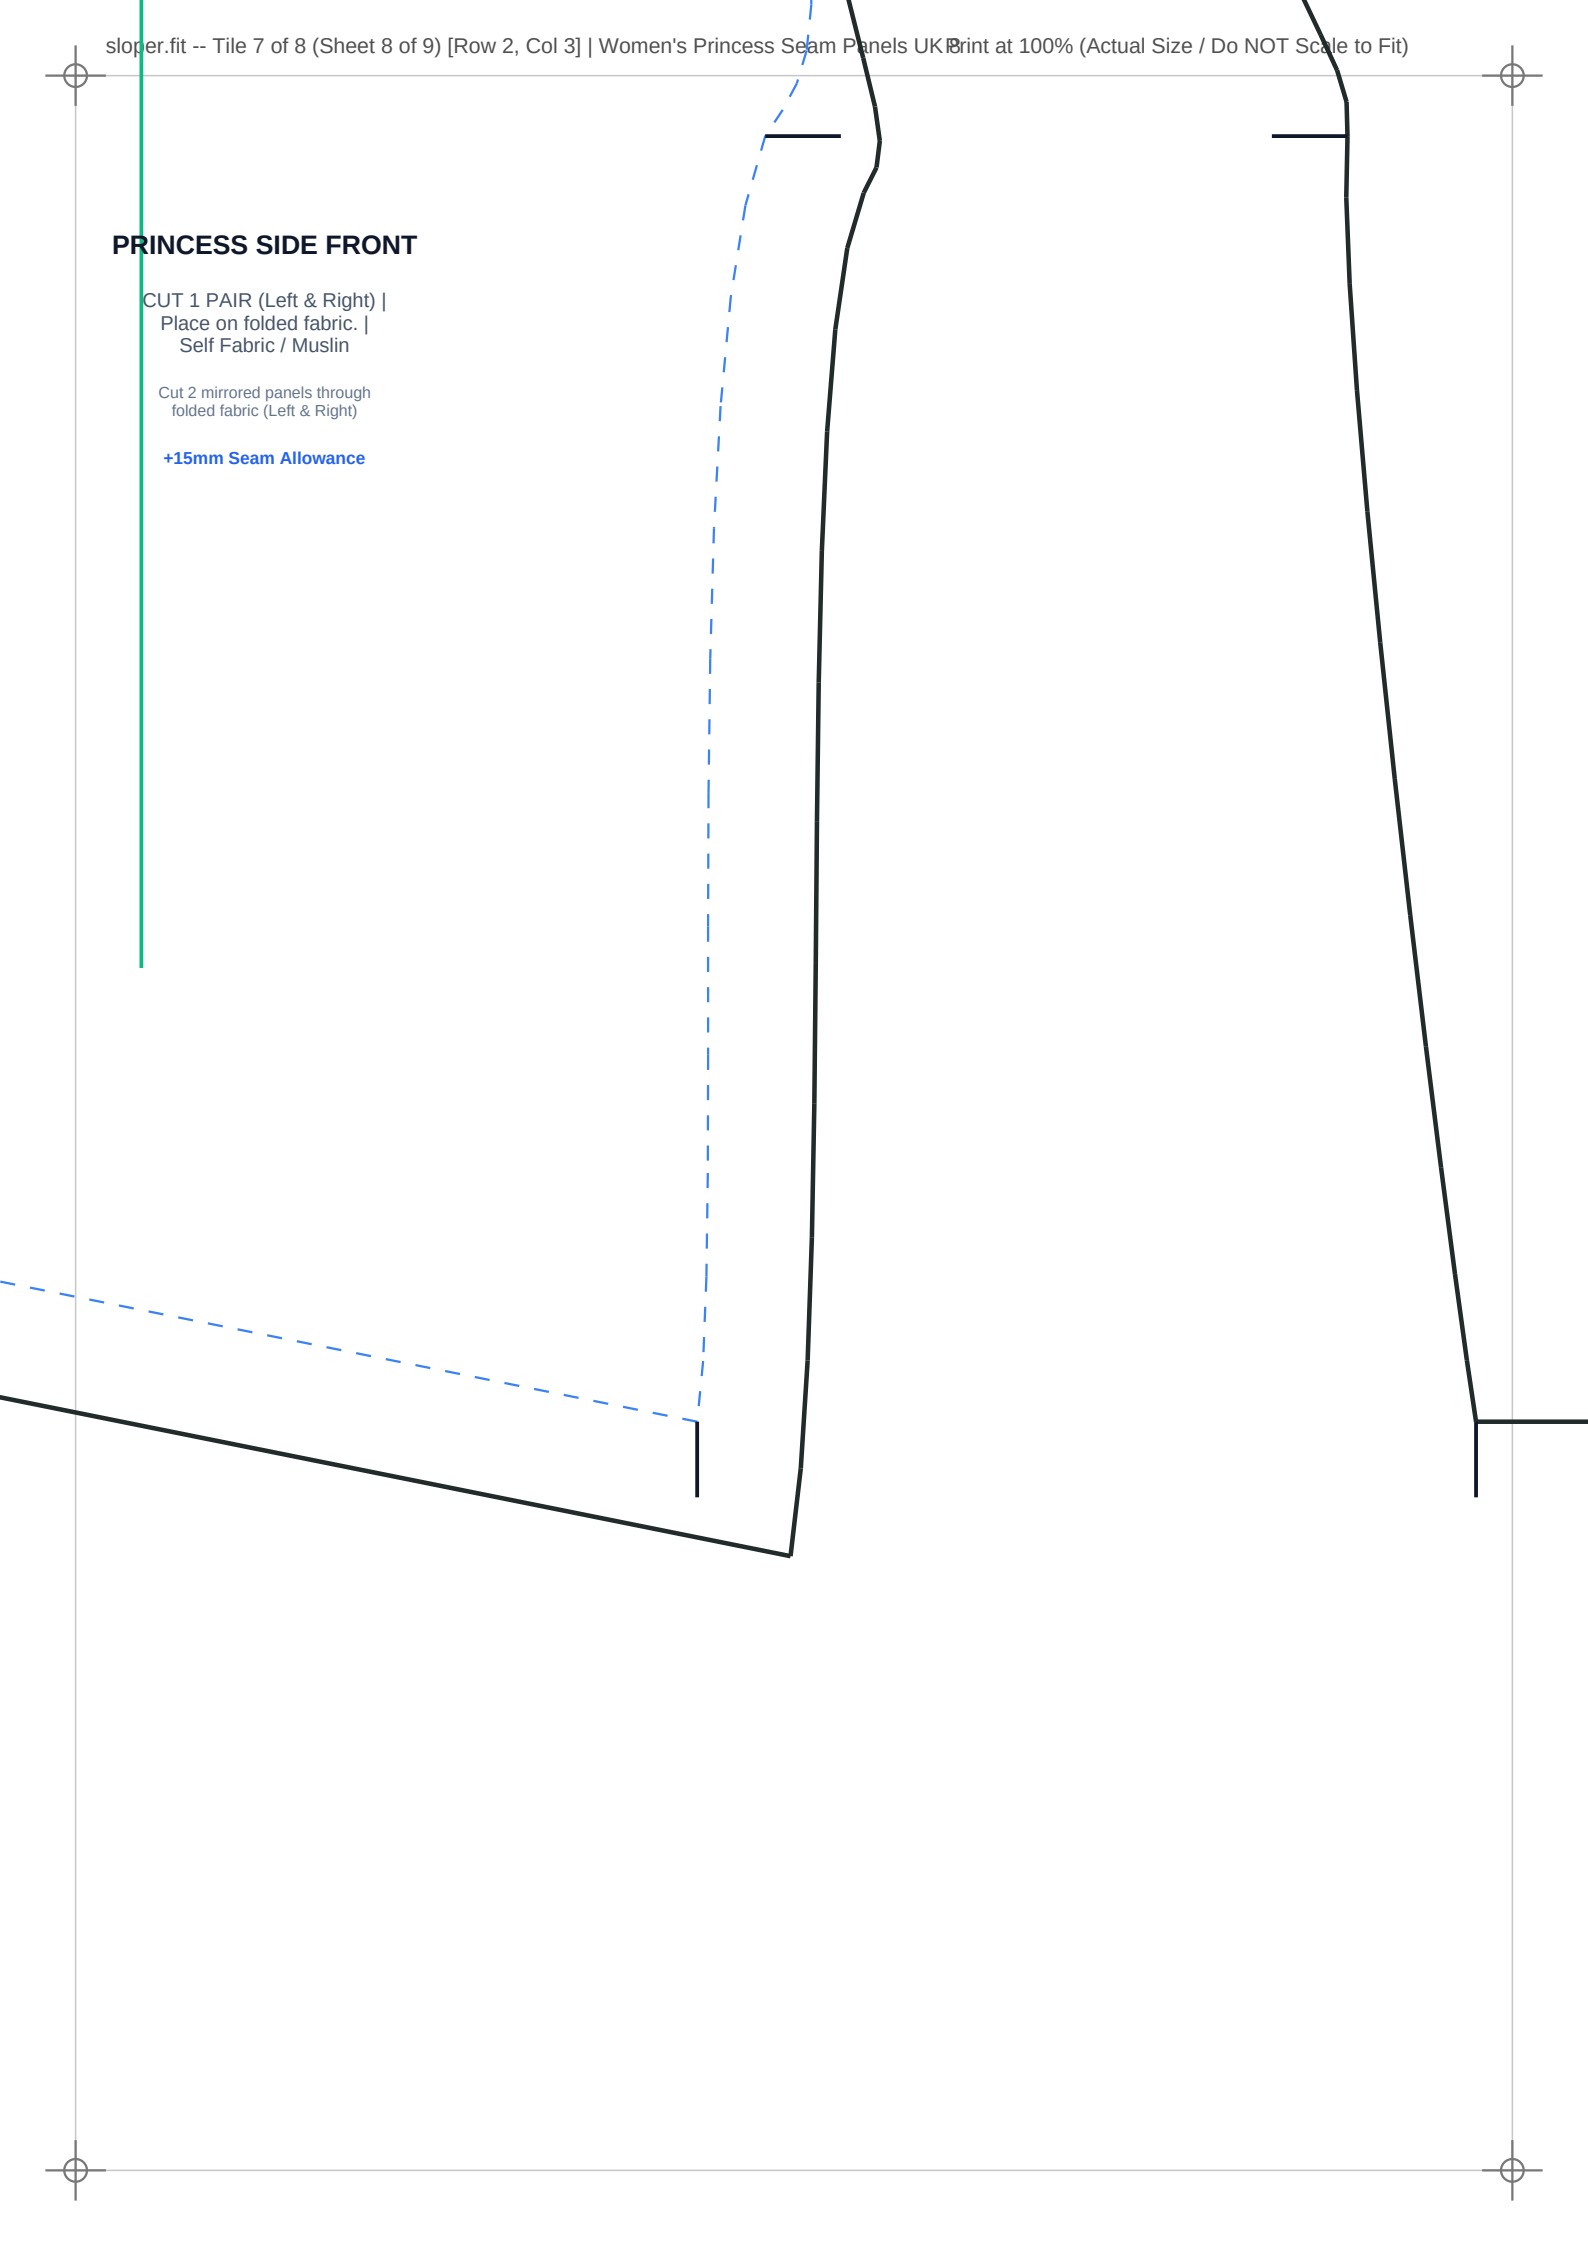

FOLD ON THIS LINE

